

SEVIER COUNTY HEALTH DEPARTMENT • DIVISION OF ENVIRONMENTAL HEALTH
 PERMIT FOR CONSTRUCTION OF SUBSURFACE SEWAGE DISPOSAL SYSTEM



Issued to: Reliance Development
 Owner, Developer, Contractor, Installer, Etc. LLC
 Location: LT Bryan Est #6
3643 Bryan Rd Acreage 4.63
 Installation: () 1. New Installation () 2. Repair to Existing System
 Establishment:
 () 1. Residential: # Bedrooms ONE
 () 2. Other: _____ (specify)
 Gal/Day _____

Evaluation Based Upon:
 () 1. Soil typing by Soil Scientist
 () a. General
 () b. High Intensity
 () c. Extra High Intensity
 () 2. Soil Percolation Test
 () 3. Environmental Specialist
 Estimated Absorption Rate: 45 MPI

Approval based upon:
 Statute No. T.C.A. 68-221-403
 () (c) Percolation test
 () (d) Grandfather clause. Current standards except those specified
 () (f) 12" (karst) and 6" (non-karst) buffer required

() (i) 9" buffer required (24"-36" total soil depth)
 () (k) Grandfather clause - meets June 30, 1990 standards (repair only)
 () Other _____
 () Current Standards

Type of Disposal System	Trench Length	Trench Width	Trench Depth	Gravel Depth	Cover-Paper/Straw
☒ Conventional System	<u>100'</u>	<u>36"</u>	<u>24-40"</u>	<u>12"</u>	<u>8-9</u>
☐ Large Diameter Gravelless Pipe () 8" () 10"					
☒ Chamber 3' Wide	<u>70'</u>	<u>36"</u>	<u>24-40"</u>		
☒ Chamber 2' Wide	<u>100'</u>	<u>24"</u>	<u>24-40"</u>		
☒ EZ Flow () 12" ☒ 14"	<u>100'</u>	<u>18"</u>	<u>24-40"</u>		
Other _____					


Septic Tank	Size
☒ Concrete	<u>750+</u>
☒ Other <u>plastic</u>	<u>750+</u>
☒ Pump Chamber	<u>750+</u>
☒ Sewage Effluent Pump	
☒ Riser / Alarm	

The recipient of this permit agrees to construct or have constructed the above described system in accordance with T.C.A. 68-221-401 et. seq. and The Regulations To Govern Subsurface Sewage Disposal Systems. If any part of the system is covered before being inspected and approved, it shall be uncovered by the recipient of the permit at the direction of personnel of the Sevier County Division of Environmental Health. Any cutting, filling or alterations of the soil conditions on the aforementioned property after this day may render this approval null and void. All installers of subsurface sewage disposal systems must hold a valid annual license from the Sevier County, Division of Environmental Health.

- NOTES: (1) Scale 1" = 100'
 (2) Install trenches on contour of land.
 (3) Maintain a 100% Duplication Area (☒).
 (4) Keep well 50 feet or more from sewage system.
 (5) 10' from property lines.
 (6) 10' trenches from house.
 (7) 5' septic tank from house.
 (8) 15' septic tank from cut bank.
 (9) 25' from cut banks and natural drains.
 (10) Call 429-1766 8:00-5:00 a.m. for inspection.

Signature of Recipient _____ Date _____
 Issued at Sevierville, Tennessee, in Sevier County
 By Adam Jones L.E.J. Date 3/5/26
 (Name and Title) (Date of Issue)

* Leave 100% Reserve under existing 2 BDRM system
 * Install on contour
 * Call with any questions

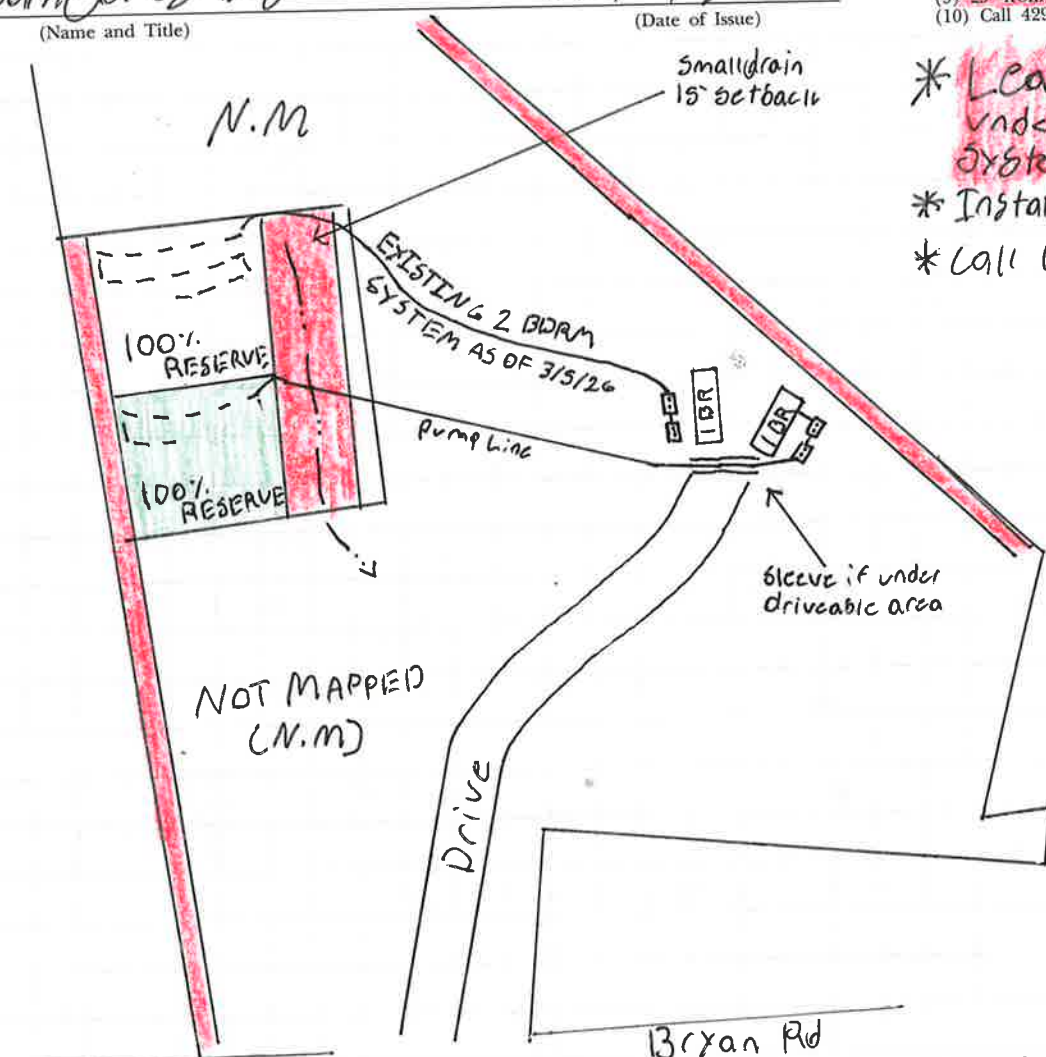

X Crossover
 SIP
 - - - Field Line
 — Solid Line
 Original - File
 Yellow - Owner

This is a permit to construct and is not intended to imply approval of any work proposed or completed on this lot.

THIS PERMIT IS VALID FOR 3 YEARS FROM DATE OF ISSUE